

searle



DSR Dual Discharge Coolers 0.8 - 15.1 kW



SPECIFICATION

GENERAL

The DSR range of low profile, low air velocity, ceiling mounted, dual discharge coolers has been designed for cold rooms, laboratories, food preparation areas and similar applications.

The 11 DSR models have from one to four fans and are available in three fin spacings, providing capacities from 0.8kW to 15.1kW. Nine models have two speed motors and all can be fitted with optional speed control.

DSR coolers are available for low temperature or high temperature applications. The revolutionary design combines compactness with efficiency and attractiveness, as well as accessibility and serviceability.

The casework is white epoxy painted galvanised steel. The coil is made from 1/2" O/D internally grooved copper tube with mechanical bonding to the proven Searle 'D' fin available in 3mm, 4mm or 6mm spacing. For ease of installation, the wiring and drain connection can be from either end of the unit.

The range calls on the experiences and designs of previous Searle coolers and provides the opportunity for close temperature control, with minimum energy demands from a compact, unobtrusive unit.

CASEWORK

All external metalwork is finished in a white high gloss epoxy powder. The coil is supported by the coil end plates and supports which are in turn connected to the hanger brackets. These enable the cooler to be mounted flush to the ceiling. Efficient condensate drainage is achieved inside the unit by sloping inner drain trays, enabling the cooler to be mounted square to the ceiling. The drain assembly is reversible for convenience of installation.

The DSR design includes a space allocation at the refrigerant connection end to allow the TEV to be housed inside the unit.

CORROSION PROTECTION

The rigid case structure is fabricated from galvanised sheet steel. Paint is applied to external surfaces in Searle's modern electrostatic powder paint plant then baked and cured at 180°C, ensuring an even, flexible and durable finish.

COILS

The coil block comprises 1/2" diameter copper tubes with an extended inner surface ensuring maximum heat transfer efficiency and minimum refrigerant charge. The tubes are mechanically expanded to form a tight interference fit into the collars of the aluminium fins. This efficient design reduces the cooler's physical size thus maximising storage capacity. Coils are tested to 35.8 bar before they leave the factory.

Coil Options:

Cu/AL Copper tubes with Aluminium fins
Cu/AV Copper tubes with vinyl-coated Aluminium fins (3mm and 4mm fin spacing).

Coils circuited for glycol.

MOTORS AND FANS

All DSR units utilise internally protected single phase squirrel cage motors of a totally enclosed, air cooled, permanent capacitor type in an IP44 enclosure. They are individually wired via plug and socket connectors and cable trays back to a robust junction box, where an electrical bridging facility is provided. High or low speed operation (excluding DSR 100 & 116) is obtained by connecting the electricity supply to the appropriate terminals. The motors are suitable for speed control via an optional Searle Triac controller (See below).

Models DSR 12 to DSR 83 use a 305mm propeller-type five-bladed fan with a fractional dual speed 25W motor. A pitch of 24° is supplied for 50Hz applications and 20° for 60Hz.

Models DSR 100 and DSR 116 are fitted with four-bladed 305mm fans and 70W single speed motors, running at 4-pole speed. A pitch of 32° is supplied for 50Hz applications and 26° for 60Hz.

SPEED CONTROL

Speed control can be utilised to tailor air velocities to suit various applications. For example to minimise possible personnel discomfort caused by air-flow or noise to improve running costs.

To achieve lower speeds on the single speed, 70 Watt motors found on the DSR 100 and 116 models, Searle offers a manually operated, Triac type speed controller, which must be ordered separately. Performances for a typical speed of 800 rpm are given in the Selection Data. For other speeds, air flow and thermal performance are approximately proportional to speed. Operation at any speed between 600 rpm and maximum is approved.

The speed controller is also suitable for controlling the motors found on other DSR models. Each speed controller will control motors up to a total full load current of 4.5 amps. Note that the speed controller must be mounted outside the refrigerated space.

NOISE LEVELS

The noise levels given in the tables are a guide to users where noise pollution is an important factor. The test figures are based on 'free field', defined as: 'unit mounted over a reflective plane with no other reflective surface'. Individual installations will have differing acoustic characteristics which will affect the noise levels. If noise is critical, advice should be sought from an acoustic consultant.

DEFROST OPTIONS

Where electric defrost is specified, heater elements are installed beneath each coil block. Models DSR 100 and DSR 116 have an additional element within each coil. (A one metre space must be allowed at one end of these two models to facilitate element withdrawal). Hot gas defrost with electric drain pan heaters can also be specified. Low temperature operation is not recommended on the 3mm fin spacing option. Natural defrost with fans operating is not suitable for coolers operating with a room temperature of less than 5°C. For applications below -20°C it is recommended that the optional sump heater is used.

SPECIFICATION

AIR HEATERS

Electric air heaters can be factory fitted to 2 or 4 row coil units (DSR 12, 19, 36, 51, 68 and 100). Up to 6kW is possible on larger units - contact your supplier for details.

INSTALLATION

Units are designed to be flush-mounted to the ceiling, using the brackets incorporated into the casework. Electrical and refrigeration connections are at opposite ends but provision has been made for the electrical cabling to be ducted through a channel to the refrigeration end if required. Access is provided for service connections through the top of the unit at each end.

The drain tray assembly can be reversed, allowing the drain connection to be sited at the preferred end. The standard drain connection is a 3/4" BSP horizontal connection, 35mm long and welded to the end of the sump.

SERVICEABILITY

Serviceability and accessibility were paramount in the design of the DSR range. Access to components such as fans, motors and defrost heaters is simple and rapid

through either the fan guard or heater covers/drain trays. Removable end panels enable easy access to the electrical junction box and refrigeration connections. Motors can be removed rapidly, due to a simple plug and socket connector and straightforward mounting plate.

QUALITY ASSURANCE

Searle is a certified company to BS EN ISO 9001 which is the highest Quality Assurance qualification currently available, covering Performance Testing, Manufacturing Systems and Inspection Procedures.



RATING CONDITIONS


The duties shown in this catalogue are at EN 328 Standard Condition 2 (-8°C saturated suction temperature, 0°C air entering).

CERTIFICATION

The range is certified under the Eurovent CERTIFY-ALL direct expansion air coolers program, with performances rated in accordance with EN 328.



INSTALLATION

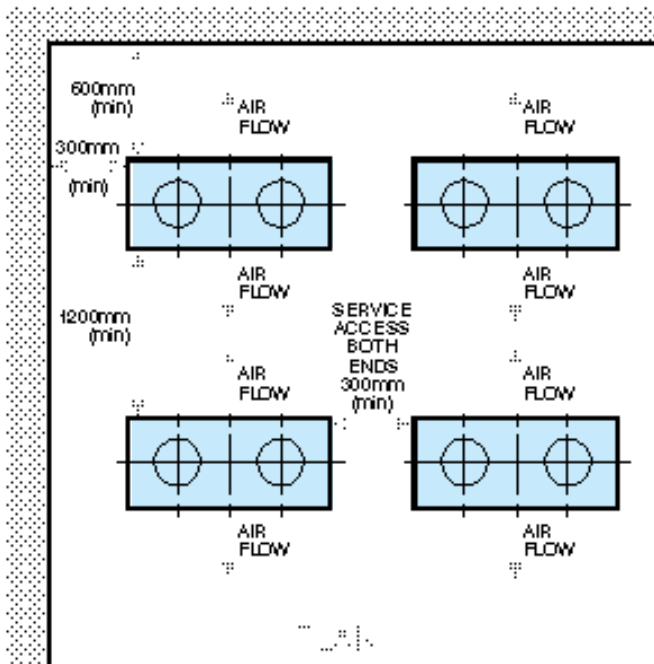

Location


The DSR is designed to draw air in the bottom and discharge it horizontally through the coils fitted on each side. For the best performance, the cooler should be placed at the geometric centre of the room or module in which it is operating.

Mounting

The DSR is primarily designed for flush ceiling mounting but may also be hung on rods. **The cooler must be level in both horizontal directions** to ensure free drainage of condensate.

Condensate Drainage

The horizontal drain connection is a 3/4" BSP(T) steel stub which is welded into the base of the drain sump. The drain line must pitch down with a minimum 2% gradient and must terminate outside the cold room with a 'U' trap seal.

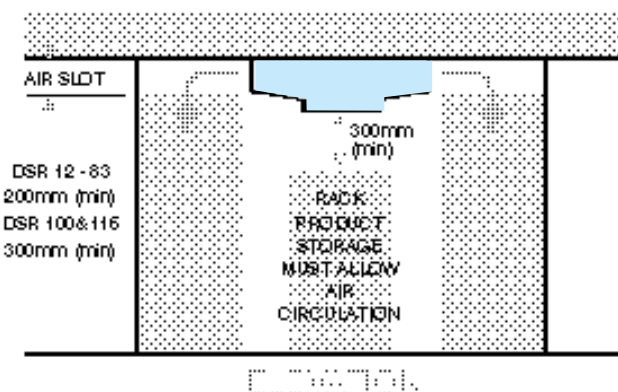

TEV Selection

It is important that the TEV is sized correctly and that the valve is fitted directly onto the distributor inlet or as close to it as possible. The TEV should be sized for the maximum capacity at the minimum pressure drop across it, which occurs at the minimum condensing pressure. In addition, the following allowance must be made for the cooler's distributor and leads:

Distributor system pressure drop

R404A, R507A, R407A	1.5 Bar
R134a	1.0 Bar

Externally equalised expansion valves should be used on all models except DSR12.

SELECTION DATA

Standard (High Speed)

	MODEL	CAPACITY kW (SC2)		MOTOR DETAILS 230V-1Ph-50Hz				FAN DATA		
		R404A R507A	No. of Fans	Total Power Input**	FLC Per Fan	SC Per Fan	Speed	Air Volume	Air Throw	Noise Level
				W	Amps	Amps	RPM	m ³ /s	m	dB(A)
3mm	DSR12-3	1.72	1	64	0.30	0.38	1300	0.32	10.9	49
	DSR19-3	2.55	1	64	0.30	0.38	1300	0.31	10.7	49
	DSR22-3	3.02	1	64	0.30	0.38	1300	0.30	10.2	49
	DSR36-3	4.75	2	128	0.60	0.76	1300	0.60	11.6	51
	DSR42-3	5.57	2	128	0.60	0.76	1300	0.58	10.7	51
	DSR51-3	7.24	3	192	0.90	1.14	1300	0.90	11.6	54
	DSR62-3	8.19	3	192	0.90	1.14	1300	0.86	10.7	54
	DSR68-3	9.54	4	256	1.20	1.52	1300	1.20	11.6	55
	DSR83-3	11.05	4	256	1.20	1.52	1300	1.15	10.7	55
DSR100-3	13.60	4	640	3.24	7.40	1400	1.65	10.1	60	
DSR116-3	15.09	4	640	3.24	7.40	1400	1.47	8.8	60	
4mm	DSR12-4	1.47	1	64	0.30	0.38	1300	0.32	10.9	49
	DSR19-4	2.14	1	64	0.30	0.38	1300	0.31	10.8	49
	DSR22-4	2.67	1	64	0.30	0.38	1300	0.30	10.5	49
	DSR36-4	4.06	2	128	0.60	0.76	1300	0.61	11.9	51
	DSR42-4	4.95	2	128	0.60	0.76	1300	0.59	10.9	51
	DSR51-4	6.15	3	192	0.90	1.14	1300	0.92	11.9	54
	DSR62-4	7.40	3	192	0.90	1.14	1300	0.88	10.9	54
	DSR68-4	8.19	4	256	1.20	1.52	1300	1.22	11.9	55
	DSR83-4	9.90	4	256	1.20	1.52	1300	1.18	10.9	55
DSR100-4	11.98	4	640	3.24	7.40	1400	1.72	10.8	60	
DSR116-4	13.70	4	640	3.24	7.40	1400	1.56	9.9	60	
6mm	DSR12-6	1.16	1	64	0.30	0.38	1300	0.32	11.1	49
	DSR19-6	1.78	1	64	0.30	0.38	1300	0.32	10.9	49
	DSR22-6	2.29	1	64	0.30	0.38	1300	0.31	10.8	49
	DSR36-6	3.33	2	128	0.60	0.76	1300	0.63	12.3	51
	DSR42-6	4.22	2	128	0.60	0.76	1300	0.61	11.3	51
	DSR51-6	4.95	3	192	0.90	1.14	1300	0.94	12.3	54
	DSR62-6	6.35	3	192	0.90	1.14	1300	0.92	11.3	54
	DSR68-6	6.68	4	256	1.20	1.52	1300	1.25	12.3	55
	DSR83-6	8.44	4	256	1.20	1.52	1300	1.22	11.3	55
DSR100-6	10.05	4	640	3.24	7.40	1400	1.84	11.5	60	
DSR116-6	12.34	4	640	3.24	7.40	1400	1.72	10.8	60	

Low Noise (Low Speed)

	MODEL	CAPACITY kW (SC2)		MOTOR DETAILS 230V-1Ph-50Hz				FAN DATA		
		R404A R507A	No. of Fans	Total Power Input**	FLC Per Fan	SC Per Fan	Speed	Air Volume	Air Throw	Noise Level
				W	Amps	Amps	RPM	m ³ /s	m	dB(A)
3mm	DSR12-3	1.20	1	26	0.14	0.14	750	0.17	7.2	34
	DSR19-3	1.67	1	26	0.14	0.14	750	0.17	6.9	34
	DSR22-3	1.89	1	26	0.14	0.14	750	0.16	6.5	34
	DSR36-3	3.13	2	52	0.28	0.28	750	0.33	7.8	37
	DSR42-3	3.44	2	52	0.28	0.28	750	0.31	7.0	37
	DSR51-3	4.64	3	78	0.42	0.42	750	0.49	7.8	39
	DSR62-3	5.05	3	78	0.42	0.42	750	0.47	7.0	39
	DSR68-3	6.25	4	104	0.56	0.56	750	0.66	7.8	40
	DSR83-3	6.77	4	104	0.56	0.56	750	0.62	7.0	40
DSR100-3▼	9.01	4	376	3.46	7.90	800	0.93	6.8	48	
DSR116-3▼	9.79	4	376	3.46	7.90	800	0.86	5.9	48	
4mm	DSR12-4	1.04	1	26	0.14	0.14	750	0.18	7.3	34
	DSR19-4	1.46	1	26	0.14	0.14	750	0.17	6.9	34
	DSR22-4	1.67	1	26	0.14	0.14	750	0.16	6.7	34
	DSR36-4	2.76	2	52	0.28	0.28	750	0.34	7.9	37
	DSR42-4	3.18	2	52	0.28	0.28	750	0.32	7.3	37
	DSR51-4	4.06	3	78	0.42	0.42	750	0.50	7.9	39
	DSR62-4	4.79	3	78	0.42	0.42	750	0.49	7.3	39
	DSR68-4	5.52	4	104	0.56	0.56	750	0.67	7.9	40
	DSR83-4	6.41	4	104	0.56	0.56	750	0.65	7.3	40
DSR100-4▼	8.23	4	376	3.46	7.90	800	0.98	7.2	48	
DSR116-4▼	9.01	4	376	3.46	7.90	800	0.89	6.6	48	
6mm	DSR12-6	0.84	1	26	0.14	0.14	750	0.18	7.5	34
	DSR19-6	1.25	1	26	0.14	0.14	750	0.17	7.1	34
	DSR22-6	1.51	1	26	0.14	0.14	750	0.17	6.9	34
	DSR36-6	2.29	2	52	0.28	0.28	750	0.34	8.0	37
	DSR42-6	2.86	2	52	0.28	0.28	750	0.34	7.6	37
	DSR51-6	3.44	3	78	0.42	0.42	750	0.52	8.0	39
	DSR62-6	4.22	3	78	0.42	0.42	750	0.50	7.6	39
	DSR68-6	4.64	4	104	0.56	0.56	750	0.69	8.0	40
	DSR83-6	5.64	4	104	0.56	0.56	750	0.67	7.6	40
DSR100-6▼	7.08	4	376	3.46	7.90	800	1.05	7.6	48	
DSR116-6▼	8.44	4	376	3.46	7.90	800	0.98	7.2	48	


SELECTION DATA

MODEL (All fin spacings)	COIL DATA							Defrost 230V (4/6mm only) kW
	Total Surface Area m ²			Int. Volume dm ³	approx. ref charge kg	CONNECTIONS		
	3mm	4mm	6mm			INLET	OUTLET	
DSR12	9.01	6.85	4.69	1.25	0.36	1/2"	1/2"	1.58
DSR19	18.02	13.69	9.38	2.50	0.72	1/2"	5/8"	1.58
DSR22	27.03	20.54	14.07	3.74	1.07	1/2"	5/8"	1.58
DSR36	32.77	24.90	17.06	4.22	1.21	1/2"	7/8"	2.85
DSR42	49.15	37.34	25.58	6.34	1.82	1/2"	7/8"	2.85
DSR51	49.15	37.34	25.58	6.14	1.76	1/2"	7/8"	4.27
DSR62	73.73	56.02	38.38	9.22	2.64	1/2"	1 1/8"	4.27
DSR68	65.54	49.79	34.11	8.07	2.31	1/2"	1 1/8"	5.70
DSR83	98.30	74.69	51.17	12.10	3.47	5/8"	1 1/8"	5.70
DSR100	98.30	74.69	51.17	12.10	3.47	5/8"	1 3/8"	7.67
DSR116	147.46	112.03	76.75	18.14	5.20	5/8"	1 3/8"	7.67

Correction Factors

(multiply capacity by appropriate correction factor to give performance at chosen conditions)

DSR Cooler DT1* - WET

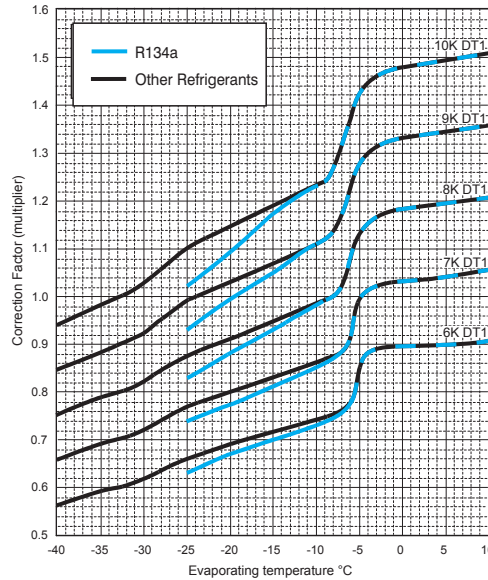

Refrigerant	R404A	R134a	R507A	R407A	R407C
Capacity Factor (dew point, DT1)	1.00	0.91	1.00	1.18*	1.35*
Capacity Factor (mid point, DT1)	0.97	0.91	1.00	0.91	1.01
Refrigerant Charge Density (kg/dm ³)	0.312	0.338	0.313	0.332	0.332

* Dew point capacity factors for refrigerants with high glide apply only at the nominal rating condition. Mid point factors can be used for all conditions.
Refrigerant Charge Densities based on 25% of the internal volume being liquid.

CAPACITY

The duties presented in the specification tables are nominal capacities for operational (or 'wet') conditions. They have been calculated from the tested 'dry' conditions, conducted in accordance with EN 328, using ratios as specified by Eurovent Standard 7/C/001 which are shown.

Test are conducted under dry conditions which allows performance to stabilise and permits measurement over a prolonged period. Please note that these ratios are already included in the performance data.

Standard Condition	Air on Temp./Evap. Temp	Relative Humidity	Ratio
SC1	10°C / 0°C	85%	1.35
SC2	0°C / -8°C	85%	1.15
SC3	-18°C / -25°C	95%	1.05
SC4	-25°C / -31°C	95%	1.00

NOTES

▼ Models 100 and 116 should only be operated at reduced speeds through the Searle Triac speed controller, which must be purchased separately. Duties shown are based on fan speeds of 800 rpm.


* DT1 is the difference between the entering air temperature and the saturated suction temperature at the outlet of the cooler.

** Total Power Input at Standard Condition 2 (-8°C saturated suction temperature, 0°C air entering)

For data on refrigerants not shown in the tables, please refer to your supplier.


DIMENSIONS

DSR Layout

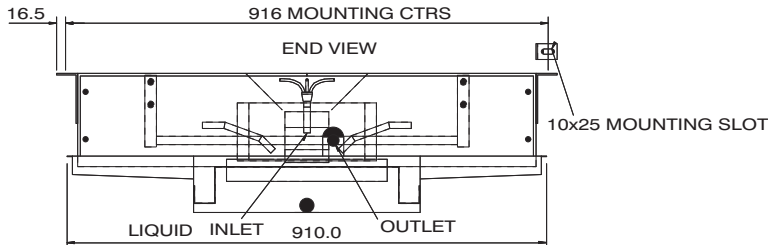

Model	Length A	Depth B	Fixing Centres C	Depth + Trays D	Fin Length E	Weight (Kg)		
						3mm	4mm	6mm
DSR12	870	266	580	445	550	53	52	52
DSR19	870	266	580	445	550	57	56	56
DSR22	870	266	580	445	550	61	59	58
DSR36	1320	266	1030	445	1000	81	79	78
DSR42	1320	266	1030	445	1000	88	85	83
DSR51	1820	266	1530	445	1500	107	104	102
DSR62	1820	266	1530	445	1500	118	113	111
DSR68	2320	266	1015 x 2	445	2000	136	132	130
DSR83	2320	266	1015 x 2	445	2000	150	144	141
DSR100	2320	351	1015 x 2	530	2000	161	155	152
DSR116	2320	351	1015 x 2	530	2000	181	172	167

All dimensions in mm

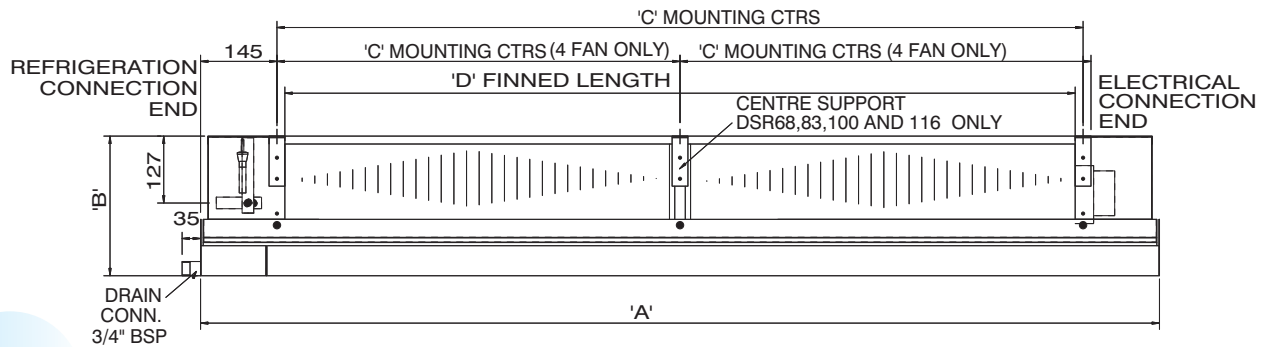

HOW TO ORDER

DSR 42 -4 L

TYPE

MODEL

FIN SPACING

- 3 = 3mm = (nominal 8FPI)
- 4 = 4mm = (nominal 6FPI)
- 6 = 6mm = (nominal 4FPI)

DEFROST

- Blank = no defrost
- L = standard electric defrost

FIN MATERIAL

- Blank = Aluminium
- AV = Vinyl Coated Aluminium

FREQUENCY

- Blank = 50Hz
- 60 = 60Hz

searle

Searle Manufacturing Company
Newgate Lane Fareham
Hampshire PO14 1AR UK

Telephone +44 (0)1329 823344
Facsimile +44 (0)1329 821242
Email sales@searle.co.uk
Website www.searle.co.uk